

{Portable}



HHS Series

Electric Powered - Oil Heated - Belt Drive

The HHS Series offers portability and reliability suitable for the most rugged applications.



Belt drive triplex General or AR plunger pump

Racor fuel/water separator



Stainless-steel coil wrap



13-inch pneumatic tires with tubes and rear wheel brake



HHS-3004-1E2G



HHS-2004-1E4G shown with skid frame (HX-0196) option

Additional Features:


- ✓ Easy pump oil drain
- ✓ Horizontal schedule 80 pipe coil
- ✓ Thermal relief valve
- ✓ No. 1 or No. 2 fuel oil, diesel or kerosene fired burner
- ✓ 35-foot power cord with ground fault circuit interrupter (GFCI on 20-amp plug on 1.5- to 6.0-HP, single-phase models) (except 208V, 1Ø units)
- ✓ Inlet polyethylene float tank
- ✓ Adjustable high pressure detergent injection
- ✓ Pressure switch and high limit switch safety controls
- ✓ 300°F/149°C operating temperature (HHS-303 only)
- ✓ Adjustable thermostat
- ✓ 10-gallon polyethylene fuel tank
- ✓ Wrinkle-finish powder coated steel frame assembly
- ✓ Wand holder
- ✓ Insulated trigger gun
- ✓ Adjustable pressure-insulated dual lance (except on HHS-303)
- ✓ Single lance with dual insulated grips; steam nozzle (HHS-303)
- ✓ Quick connect nozzles (0°, 15°, 25°, 40°) and low pressure nozzle (1000- to 3000-PSI models)
- ✓ 50-foot x 3/8-inch high pressure hose with quick connects (50-foot steam hose on HHS-303)



[Portable]

Specifications:

Model #	HHS-1002-1E1G*	HHS-1003-1E1G*	HHS-1502-1E1G*
Pressure (psi)	1000	1000	1500
Flow (gpm)	2.0	2.8	1.8
Motor	120V, 1Ø, 16.2A	120V, 1Ø, 20.0A	115V, 1Ø, 19.9A
Horsepower	1.5	2.0	2.0
Plug type	NEMA 5-20P	NEMA 5-20P	NEMA 5-20P
Fuel Cons. (gph)	1.23	1.84	1.23
BTU per hour	172,200	257,600	172,200
Dim. (LxWxH)	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.
Shipping weight	606 lbs.	610 lbs.	610 lbs.
Net weight	486 lbs.	490 lbs.	490 lbs.

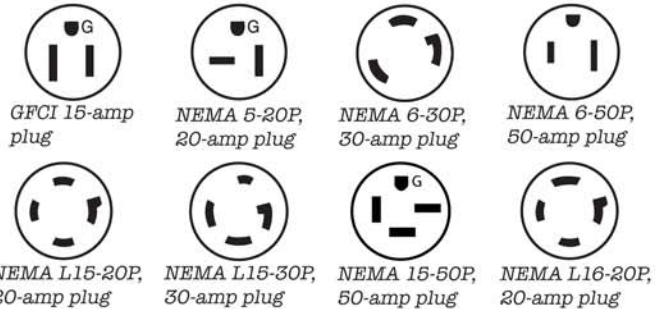

Model #	HHS-2004-1E2G*	HHS-2004-1E3G*	HHS-2004-1E4G*	HHS-2004-1E8G*	HHS-2004-1E9G*
Pressure (psi)	2000	2000	2000	2000	2000
Flow (gpm)	4.2	4.2	4.2	4.2	4.2
Motor	230V, 1Ø, 28.0A	230V, 3Ø, 18.5A	460V, 3Ø, 12.0A	208V, 1Ø, 30.7A	208V, 3Ø, 29.9A
Horsepower	6.0	6.0	6.0	6.0	6.0
Plug type	NEMA 6-30P	NEMA L15-20P	NEMA L16-20P	NEMA 6-50P	NEMA L15-30P
Fuel Cons. (gph)	2.76	2.76	2.76	2.76	2.76
BTU per hour	386,400	386,400	386,400	386,400	386,400
Dim. (LxWxH)	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.
Shipping weight	670 lbs.	670 lbs.	670 lbs.	670 lbs.	670 lbs.
Net weight	550 lbs.	550 lbs.	550 lbs.	550 lbs.	550 lbs.



Model #	HHS-3004-1E2G*	HHS-3004-1E3G*	HHS-3004-1E4G*	HHS-3004-1E5G*	HHS-3004-1E8G*	HHS-3004-1E9G*
Pressure (psi)	3000	3000	3000	3000	3000	3000
Flow (gpm)	3.9	3.9	3.9	3.9	3.9	3.9
Motor	230V, 1Ø, 39.5A	230V, 3Ø, 22.5A	460V, 3Ø, 14.0A	575V, 3Ø, 12.0A	208V, 1Ø, 43.0A	208V, 3Ø, 25.5A
Horsepower	8.0	8.0	8.0	8.0	8.0	8.0
Plug type	NEMA 6-50P	NEMA L15-30P	NEMA L16-20P	NEMA L17-30P	NEMA 6-50P	NEMA L15-30P
Fuel Cons. (gph)	2.45	2.45	2.45	2.45	2.45	2.45
BTU per hour	341,800	341,800	341,800	341,800	341,800	341,800
Dim. (LxWxH)	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.
Shipping weight	700 lbs.	700 lbs.	700 lbs.	700 lbs.	700 lbs.	700 lbs.
Net weight	580 lbs.	580 lbs.	580 lbs.	580 lbs.	580 lbs.	580 lbs.

Model #	HHS-3005-1E2G*	HHS-3005-1E3G*	HHS-3005-1E4G*	HHS-3005-1E5G*	HHS-3005-1E8G*	HHS-3005-1E9G*	HHS-303-0E1A^
Pressure (psi)	3000	3000	3000	3000	3000	3000	300
Flow (gpm)	4.8	4.8	4.8	4.8	4.8	4.8	2.5
Motor	230V, 1Ø, 46.5A	230V, 3Ø, 27.5A	460V, 3Ø, 16.5A	575V, 3Ø, 14.0A	208V, 1Ø, 50.7A	208V, 3Ø, 31.5A	120V, 1Ø, 12.5A
Horsepower	10.0	10.0	10.0	10.0	10.0	10.0	1.5
Plug type	NEMA 6-50P	NEMA L15-30P	NEMA L16-20P	NEMA L17-30P	NEMA 6-50P	NEMA 15-50P	GFCI 15 Amp
Fuel Cons. (gph)	3.06	3.06	3.06	3.06	3.06	3.06	2.76
BTU per hour	428,400	428,400	428,400	428,400	428,400	428,400	386,400
Dim. (LxWxH)	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.	57in.x30in.x41.5in.
Shipping weight	704 lbs.	704 lbs.	704 lbs.	704 lbs.	704 lbs.	704 lbs.	480 lbs.
Net weight	584 lbs.	584 lbs.	584 lbs.	584 lbs.	584 lbs.	584 lbs.	460 lbs.

*Note: AR Pumps are available on these models "1E_A".
^Steamer unit.

Options:

- 50-0170 Stack adapter - Allows 8-inch flue pipe to be installed to boiler exhaust port
- 850-0324 Gasket (for 50-0170) - Seals between 50-0170 stack adapter and boiler housing
- HX-0161 Hour meter - Displays number of hours unit has been in operation
- HX-0162 Stainless-steel bottom wrap - Converts powder coated painted bottom wrap to stainless-steel
- HX-0163 13-inch mag tires - Upgrade to mag tires from white rim tires
- HX-0164 Time delay shutdown - Timer will shut unit off automatically when trigger gun is released and timer reaches setting
- HX-0165, HX-0167 Option ready kit - This option is required if adding time delay shutdown or auto start/stop
- HX-0166 Auto start/stop - When trigger gun is released timer will turn unit off, when trigger gun is pulled unit will restart
- HX-0171 Skid feet - Stationary applications
- HX-0172 - HX-0176, HX-0195 250°F steam - Increases outlet temperature to 250°F
- HX-0196 Skid frame/roll cage design - Stationary applications
- TX-1304-W Puncture-proof tires - Tires are flat-free, maintenance-free and non-marking, 13-inch, white hub, four tires

Model #	50-0170	850-0324	HX-0161	HX-0162	HX-0163	HX-0164	HX-0165	HX-0166	HX-0167	HX-0171	HX-0172	HX-0173	HX-0174
HHS-1002	●	●	●	●	●	●	●	●	●	●	●		
HHS-1003	●	●	●	●	●	●	●	●	●	●	●		●
HHS-1502	●	●	●	●	●	●	●	●	●	●	●		
HHS-2004	●	●	●	●	●	●	●	●	●	●	●	●	
HHS-3004	●	●	●	●	●	●	●	●	●	●	●		
HHS-3005	●	●	●	●	●	●	●	●	●	●	●		
HHS-303	●	●	●	●	●	●	●	●	●	●	●		

Model #	HX-0175	HX-0176	HX-0195	HX-0196TX-1304-W
HHS-1002				●
HHS-1003				●
HHS-1502			●	●
HHS-2004				●
HHS-3004	●			●
HHS-3005		●		●
HHS-303				●

2111 Catalina
Pasadena, TX 77503
281-479-5966 800-458-6304
www.alklean.com