



795SS, 895SS

and 790SS Hot Water Pressure Washers

#1 in North America for
High-Pressure Cleaning Equipment

Electric / Belt Drive

Pressure relief valve protects the machine and user from thermal expansion



Heater coil carries a 5-year warranty

Upright, oil fired burner delivers high efficiency with diesel fuel, kerosene or home-heating oil

Control panel includes adjustable temperature control plus heavy-duty heater and pump motor switches

5 HP, 230V, 1 PH Baldor electric motor (Model 795SS) comes with thermal overload protection and manual reset



High quality float valve helps maintain constant pressure and flow and traps sediment or debris. It is recessed at center of chassis for protection and balance



Rugged belt drive provides smooth, quiet operation and outstanding reliability

Ground Fault Circuit Interrupter (GFCI breaker) provides additional protection against shock hazard

Rust-proof cross linked polyethylene fuel tank eliminates condensation that can contaminate fuel. Fuel gauge in cap.

Triplex pumps carry a 7-year limited warranty

Model 795SS
3.5 GPM @2000 PSI



Convenient hose-reel bracket accepts swivel or stationary reels

Pneumatic tires with inner tubes provide easy maneuverability over pavement or rough terrain

Belt tension adjusts easily by turning a single bolt

Variable upstream detergent injection ensures high-pressure sudsing



Model 895SS
3.5 GPM @3000 PSI

FEATURES

- 2.8 or 3.5 GPM @ 2000 or 3000 PSI
- Oil Fired Burners
- 208V or 230V, 1PH
- 4 to 8.2 HP
- 1330 or 1490 RPM Belt Drive Pumps



Built-in wand and nozzle holders provide convenient storage

- Oil Fired Burners
- 2.8 or 3.5 GPM @ 2000 or 3000 PSI
- 7-Year Pump Warranty
- 1330 or 1490 RPM Belt Drive Pumps


SPECIFICATIONS

BELT DRIVE

MODEL	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP MODEL	PUMP RPM	BTU/HR	PORTABILITY	HOSE	SHIP WT (lbs)
790SS	2.8	2000	4TEFC*	1725	230/1	20	Oil	HHC340R.1	1330	289,900	Std	50'	460
795SS	3.5	2000	5	3450	230/1	24	Oil	HHC340R.1	1490	289,900	Std	50'	460
795SS-208	3.5	2000	5	3450	208/1	27	Oil	HHC340R.1	1490	289,900	Std	50'	500
895SS	3.5	3000	8.2	3450	230/1	36	Oil	HHC506R.1	1490	289,900	Std	50'	480

Dimensions: 37"l x 28"w x 45.5"h

*Totally enclosed fan cooled (TEFC)

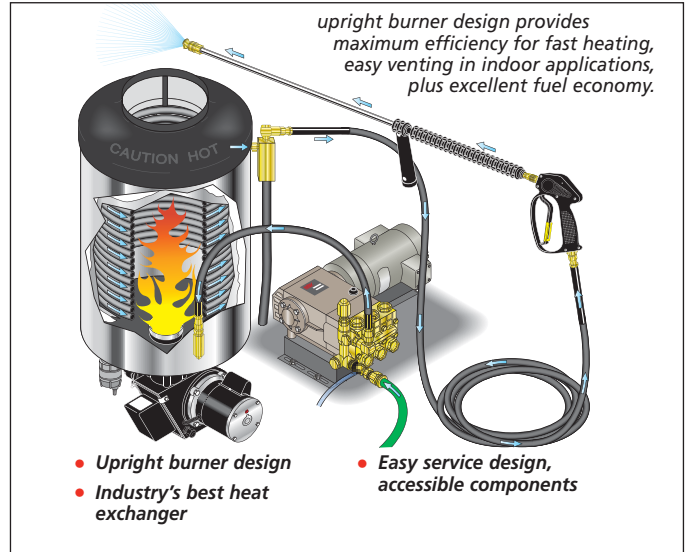

OPTIONS:

- 8" Oil-Fired Draft Dampener** prevents backdrafts and keeps cold air out.

Accessories customize your application for top performance



360° Pivot and non-pivot hose reels keep hose neatly stored and shop areas safe



High-pressure turbo nozzles for faster cleaning

Telescoping wands extend to 24' to reach high places without scaffolding



Heavy-duty, high-pressure hoses in lengths up to 150-ft.



Rotary surface cleaner attaches to your pressure washer; reduces overspray and zebra striping

Alklean Industries
2111 Catalina
Pasadena, TX 77503

281-479-5966
800-458-6304

www.alklean.com

