

HHS Specifications

| Model No. | PSI | GPM | HP/Motor | Plug Type | Burner Fuel Tank Cap. | Consumption | BTU | Dimensions (LxWxH) | Ship Wt. | Net Wt. |
|---------------|------|-----|---------------------|------------|-----------------------|-------------|---------|---------------------|----------|----------|
| HHS-1002-1E1G | 1000 | 2.0 | 1.5/120V, 10, 16.2A | NEMA 5-20P | 10.0 gallon | 1.23 gph | 172,000 | 57in.x30in.x41.5in. | 606 lbs. | 486 lbs. |
| HHS-1003-1E1G | 1000 | 2.8 | 2.0/120V, 10, 20.0A | NEMA 5-20P | 10.0 gallon | 1.84 gph | 257,000 | 57in.x30in.x41.5in. | 610 lbs. | 490 lbs. |
| HHS-1502-1E1G | 1500 | 1.8 | 2.0/115V, 10, 19.9A | NEMA 5-20P | 10.0 gallon | 2.23 gph | 172,000 | 57in.x30in.x41.5in. | 610 lbs. | 490 lbs. |

| Model No. | PSI | GPM | HP/Motor | Plug Type | Burner Fuel Tank Cap. | Consumption | BTU | Dimensions (LxWxH) | Ship Wt. | Net Wt. |
|---------------|------|-----|---------------------|--------------|-----------------------|-------------|---------|---------------------|----------|----------|
| HHS-2004-1E2G | 2000 | 4.2 | 6.0/230V, 10, 28.0A | NEMA 6-30P | 10.0 gallon | 2.76 gph | 386,400 | 57in.x30in.x41.5in. | 670 lbs. | 550 lbs. |
| HHS-2004-1E3G | 2000 | 4.2 | 6.0/230V, 30, 18.5A | NEMA L15-20P | 10.0 gallon | 2.76 gph | 386,400 | 57in.x30in.x41.5in. | 670 lbs. | 550 lbs. |
| HHS-2004-1E4G | 2000 | 4.2 | 6.0/460V, 30, 12.0A | NEMA L16-20P | 10.0 gallon | 2.76 gph | 386,400 | 57in.x30in.x41.5in. | 670 lbs. | 550 lbs. |
| HHS-2004-1E8G | 2000 | 4.2 | 6.0/208V, 10, 30.7A | NEMA 6-50P | 10.0 gallon | 2.76 gph | 386,400 | 57in.x30in.x41.5in. | 670 lbs. | 550 lbs. |
| HHS-2004-1E9G | 2000 | 4.2 | 6.0/208V, 30, 29.9A | NEMA L15-30P | 10.0 gallon | 2.76 gph | 386,400 | 57in.x30in.x41.5in. | 670 lbs. | 550 lbs. |

| Model No. | PSI | GPM | HP/Motor | Plug Type | Burner Fuel Tank Cap. | Consumption | BTU | Dimensions (LxWxH) | Ship Wt. | Net Wt. |
|---------------|------|-----|---------------------|--------------|-----------------------|-------------|---------|---------------------|----------|----------|
| HHS-3004-1E2G | 3000 | 3.9 | 8.0/230V, 10, 39.5A | NEMA 6-50P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |
| HHS-3004-1E3G | 3000 | 3.9 | 8.0/230V, 30, 22.5A | NEMA L15-30P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |
| HHS-3004-1E4G | 3000 | 3.9 | 8.0/460V, 30, 14.0A | NEMA L16-20P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |
| HHS-3004-1E5G | 3000 | 3.9 | 8.0/575V, 30, 12.0A | NEMA L17-30P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |
| HHS-3004-1E8G | 3000 | 3.9 | 8.0/208V, 10, 43.0A | NEMA 6-50P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |
| HHS-3004-1E9G | 3000 | 3.9 | 8.0/208V, 30, 25.5A | NEMA L15-30P | 10.0 gallon | 2.14 gph | 341,800 | 57in.x30in.x41.5in. | 700 lbs. | 580 lbs. |

| Model No. | PSI | GPM | HP/Motor | Plug Type | Burner Fuel Tank Cap. | Consumption | BTU | Dimensions (LxWxH) | Ship Wt. | Net Wt. |
|---------------|------|-----|----------------------|--------------|-----------------------|-------------|---------|---------------------|----------|----------|
| HHS-3005-1E2G | 3000 | 4.8 | 10.0/230V, 10, 46.5A | NEMA 6-50P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |
| HHS-3005-1E3G | 3000 | 4.8 | 10.0/230V, 30, 27.5A | NEMA L15-30P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |
| HHS-3005-1E4G | 3000 | 4.8 | 10.0/460V, 30, 16.5A | NEMA L16-20P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |
| HHS-3005-1E5G | 3000 | 4.8 | 10.0/575V, 30, 14.0A | NEMA L17-30P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |
| HHS-3005-1E8G | 3000 | 4.8 | 10.0/208V, 10, 50.7A | NEMA 6-50P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |
| HHS-3005-1E9G | 3000 | 4.8 | 10.0/208V, 30, 31.5A | NEMA L15-50P | 10.0 gallon | 3.06 gph | 428,400 | 57in.x30in.x41.5in. | 704 lbs. | 584 lbs. |

HHS-303-1E1A^A 300 2.5 1.5/120V, 10, 12.5A GFCI 15 Amp 10.0 gallon 57in.x30in.x41.5in. 480 lbs. 460 lbs.

^ASteamer unit Note: AR pumps are available on all models

Options

- 50-0170 **Stack adapter** - Allows 8-inch flue pipe to be installed to boiler exhaust port
- 850-0324 **Gasket (for 50-0170)** - Seals between 50-0170 stack adapter and boiler housing
- HX-0161 **Hour meter** - Displays number of hours unit has been in operation
- HX-0162 **Stainless-steel bottom wrap** - Covers powder coated paint bottom wrap to stainless-steel
- HX-0163 **13-inch mag tires** - Upgrade to mag tires from white rims and tires
- HX-0164 **Time delay shutdown** - Timer will shut unit off automatically when trigger gun is released and timer reaches setting
- HX-0165, HX-0167 **Option ready kit** - This option is required if adding time delay shut down or auto start/stop
- HX-0166 **Auto start/stop** - When trigger gun is released timer will turn unit off, when trigger gun is pulled unit will restart
- HX-0171 **Skid feet** - Stationary applications
- HX-0172 - HX-0176 & HX-0195 **250° Steam** - Increases outlet temperature to 250°F
- HX-0196 **Skid frame/roll cage design** - Stationary applications
- TX-1304-W **Puncture-proof tires** - Tires are flat-free, maintenance-free, 13-inch, white hub, four tires

| Model # | 50-0170 | 850-0324 | HX-0161 | HX-0162 | HX-0163 | HX-0164 | HX-0165 | HX-0166 | HX-0167 | HX-0171 | HX-0172 | HX-0173 | HX-0174 |
|----------|---------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| HHS-1002 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-1003 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-1502 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-2004 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-3004 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-3005 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| HHS-303 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

| Model # | HX-0176 | HX-0195 | HX-0196 | TX-1304-W |
|----------|---------|---------|---------|-----------|
| HHS-1002 | ● | ● | ● | ● |
| HHS-1003 | ● | ● | ● | ● |
| HHS-1502 | ● | ● | ● | ● |
| HHS-2004 | ● | ● | ● | ● |
| HHS-3004 | ● | ● | ● | ● |
| HHS-3005 | ● | ● | ● | ● |
| HHS-303 | ● | ● | ● | ● |



GFCI 15-amp plug



NEMA 5-20P, 20-amp plug



NEMA 6-30P, 30-amp plug



NEMA L15-50P, 50-amp plug



NEMA L16-20P, 20-amp plug



NEMA L17-30P, 30-amp plug



NEMA 6-50P, 50-amp plug



NEMA L15-20P, 20-amp plug



NEMA L15-30P, 30-amp plug

Distributed by:



Hot Water Pressure Washers HHS Series



HHS Series


The HHS Series offers portability and reliability suitable for the most rugged applications.

ELECTRIC POWERED - OIL HEATED - BELT DRIVE

PORTABLE



Belt drive triplex General or AR plunger pump has the best warranty in the industry



Fuel/water separator ensures clean fuel supply to the burner



Optional stack adapter allows 8-inch flue pipe to be installed to vent machine exhaust



Locking rear wheel brake prevents unit from rolling

Additional Features:

- ✓ Open drip-proof electric motor with thermal overload protection
- ✓ Easy pump oil drain
- ✓ Thermal relief valve
- ✓ Pressure switch and high limit switch safety controls
- ✓ 300°F/149°C operating temperature (HHS-303 only)
- ✓ Wand holder
- ✓ Insulated trigger gun with safety lock-off
- ✓ Adjustable pressure-insulated dual lance/wand (except on HHS-303)
- ✓ Single lance with dual insulated grips; steam nozzle (HHS-303)
- ✓ 50-foot x 3/8-inch high pressure hose with quick connects (50-foot steam hose on HHS-303)
- ✓ Temperature rise 150°F/66°C above ambient, maximum outlet temperature is 200°F




HHS-3004-1E2G



HHS-2004-1E4G shown with skid frame (HX-0196) option



Alklean Industries - 2111 Catalina - Pasadena, TX 77503 - (281)479-5966

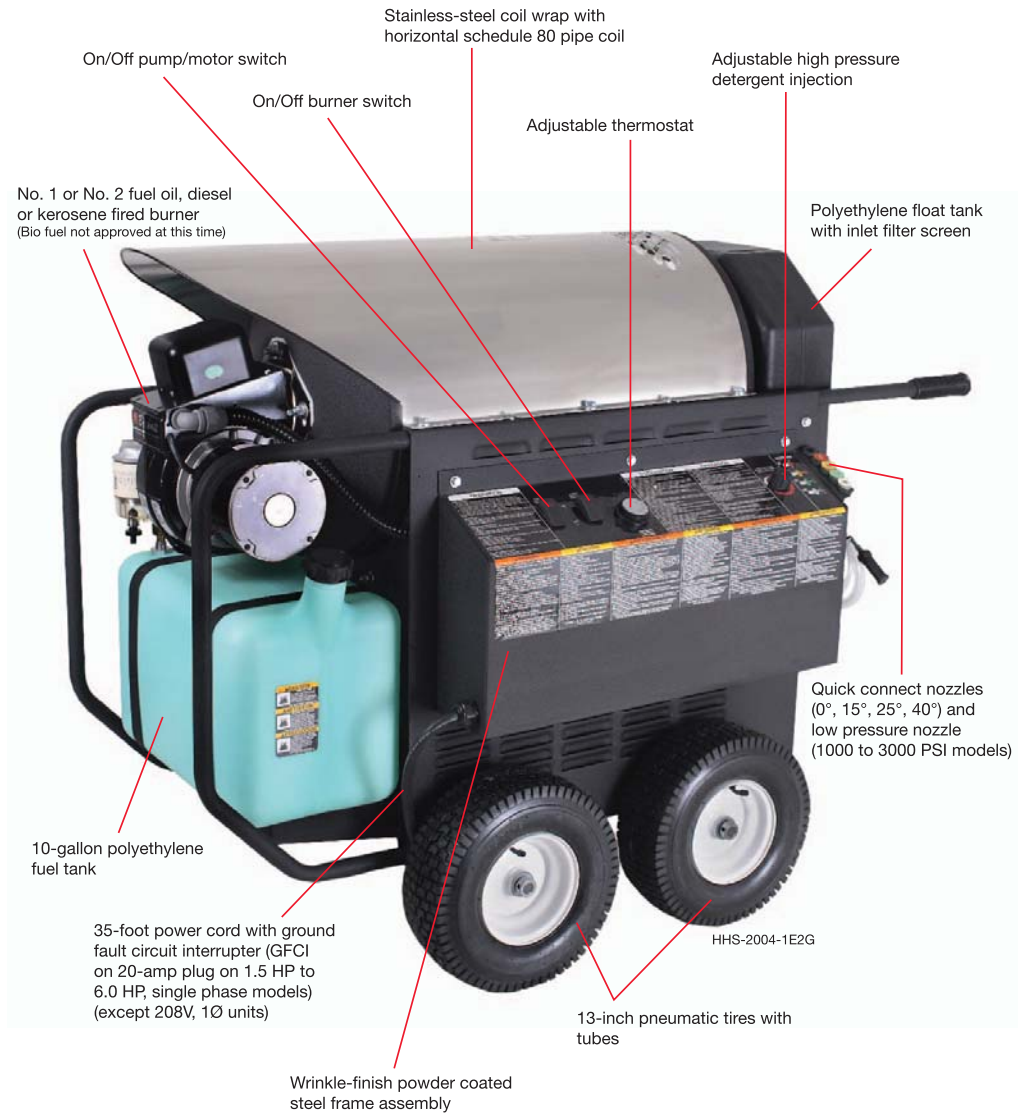

Alklean Industries - 2111 Catalina - Pasadena, TX 77503 - (281)479-5966